

# 118-B series

**BOX HEADER 2.00mm(0.079" )**

Position	A	B	C	Position	A	B	C
10	17.2	16.1	8	30	37.2	36.1	28
12	19.2	18.1	10	34	41.2	40.1	32
14	21.2	20.1	12	40	47.2	46.1	38
16	23.2	22.1	14	50	57.2	56.1	48
20	27.2	26.1	18	60	67.2	66.1	58
26	33.2	32.1	24	64	71.2	70.1	62

## Specifications:


Contact Resistance: 30mΩ max.at DC 100mA  
 Insulator Resistance: 1000MΩ min.at DC 500V  
 Current Rating: 1AMP

## Dielectric Withstanding


Voltage: AC 500V For 1 minute  
 Operating Temperature: -55° C- +105° C  
 Contact: Brass  
 Housing: PBT &30% Glass Fiber(UL 94V-0)

## How To Order

118-B -10 G S K

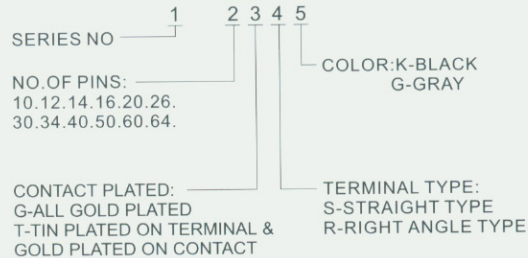

## [STRAIGHT]



## [RIGHT ANGLE]

