

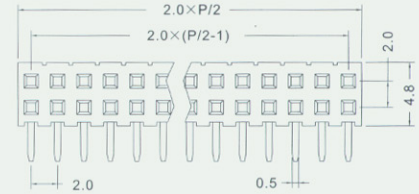


117-A series

FEMALE HEADER
2.00mm(0.079").

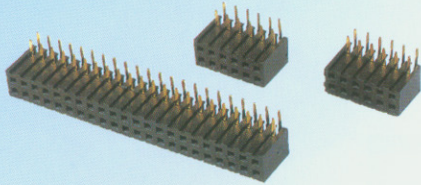

Specifications:

Contact Resistance: 30m Ω max.at DC 100 mA
Insulator Resistance: 1000M Ω min.at DC 500V
Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
Operating Temperature: -55° C--+105° C
Contact: Phosphor Bronze
Housing: PBT &30% Glass Fiber(UL 94V-0)

How To Order

117-A -S S40 G

SERIES NO 1
ROW TYPE: 2 3 4 5
D-DOUBLE ROW
S-SINGLE ROW
CONTACT PLATED:
T-ALL TIN PLATED
G-ALL GOLD PLATED
TERMINAL TYPE:
S-STRAIGHT TYPE
R-RIGHT ANGLE TYPE
NO.OF PINS:
4 TO 80