

136 series


XH CONNECTOR 2.54mm(0.100")

Position	A	B	C	D
2	7.28	2.54	6.88	2.54
3	9.82	5.08	9.42	5.08
4	12.36	7.62	11.96	7.62
5	14.90	10.16	14.50	10.16
6	17.44	12.70	17.04	12.70
7	19.98	15.24	19.58	15.24
8	22.52	17.78	22.12	17.78
9	25.06	20.32	24.66	20.32
10	27.60	22.86	27.20	22.86
11	30.14	25.40	29.74	25.40
12	32.68	27.94	32.28	27.94
13	35.22	30.48	34.82	30.48
14	37.76	33.02	37.36	33.02
15	40.30	35.56	39.90	35.56
16	42.84	38.10	42.44	38.10
17	45.38	40.64	44.98	40.64
18	47.92	43.18	47.52	43.18
19	50.46	45.72	50.06	45.72
20	53.00	48.26	52.60	48.26


Material & Finish

Insulator Material: Nylon 66 (UL 94V-0)
 Contact Material: Brass
 Contact Plated: Tin Plated
 Number of Contacts: 2 Thru 20
 Color: White


How To Order

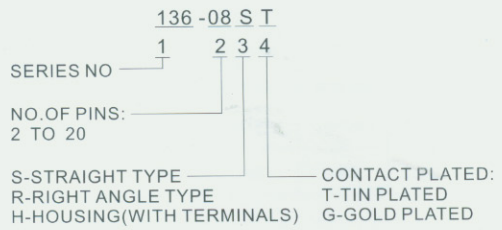


[STRAIGHT]



[RIGHT ANGLE]



[HOUSING]

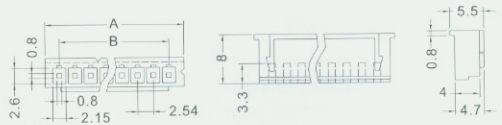

[TERMINALS]

