




A

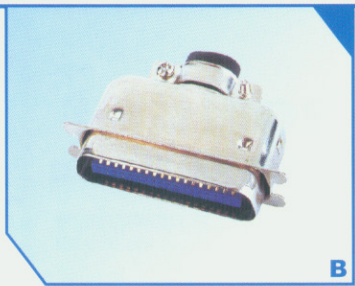

B

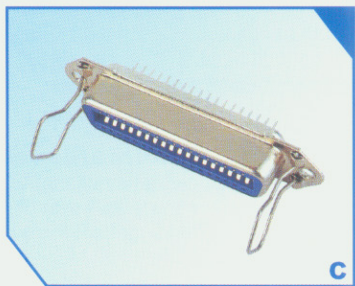

C

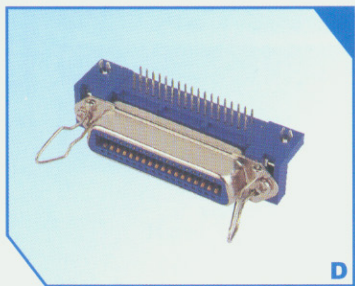

D

I45A	I45B	I45C	I45D
10360			
10500			
		20360	
		20500	
	30360		
	30500		
40360			40360
40500			40500

Material

Insulator: PBT&30% Glass Fiber(UL 94V-0)
 Contact: Phosphor Bronze or Brass
 Contact Plated: Gold Over Nickel
 Shell: Steel
 Zinc Plated or Tin Plated


Specification

Current Rating: 5AMP
 Dielectric Strength: 1000V For 1minute
 Insulator Resistance: 1000M Ω min.at DC500V
 Temperature: -55° C-- +105° C

150 series

CENTRONIC CONNECTORS

How To Order

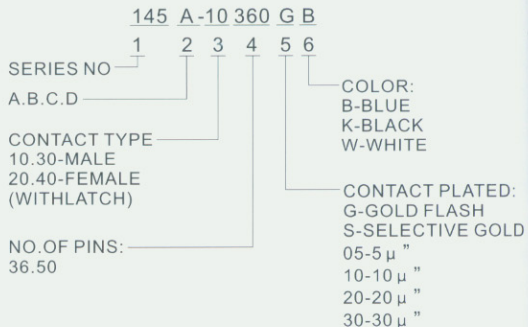

FEATURES

- Standard contact terminations accommodate up to 20AWG standard Wire
- The keystone shape of the shell assures proper polarization
- coupling is accomplished by contact friction although standard locking accessories may be used
- With standard nylon insulators, operating temperatures range from -65° F to +250° F (-55° C to +120° C) the limiting factor is the insulator material
- With standard gold plated contacts