

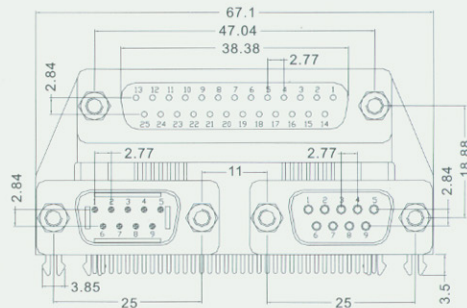


162 series

D-SUB CONNECTORS THREE IN ONE(25F/2*9M)

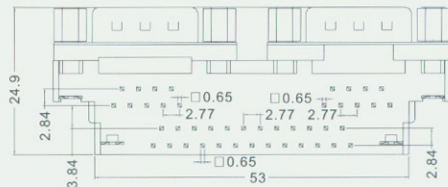

Specifications:

Contact Resistance: 30m Ω max

Insulator Resistance: 1000M Ω min.at DC 500V

Current Rating: 3AMP

Dielectric Withstanding:

Voltage: AC 1000V For 1 minute

Contact: Brass

Housing: PBT &30% Glass Fiber(UL 94V-0)

How To Order

162 - W 1 G

1 2 3 4

SERIES NO

CONTACT PLATED:
T-TIN PLATED
G-GOLD PLATED

COLOR OF HOUSING
W-WHITE
K-BLACK
B-BLUE

SHELL PLATED
1-CHROMATED SHELL
2-TIN SHELL