

130-A series

DUPONT CONNECTOR

2.54mm(0.100")

Position	2 Thru 32
Dimension	4 Thru 64
A	2.54*Position No .
B	2.54*Position No . -2.54

Specifications:

Contact Resistance: 100m Ω max.

Insulator Resistance: 1000M Ω min.at DC 500V

Current Rating: 3AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute

Operating Temperature: -25° C--+85° C

Contact: Phosphor Bronze

Housing: Nylon UL 94V-0

How To Order

130-A -S 40

1 2 3

SERIES NO

ROW TYPE:

D-DOUBLE ROW



S-SINGLE ROW

NO.OF PINS:

SINGLE ROW FROM 02 TO 32

DOUBLE ROW FROM 04 TO 64

[HOUSING]

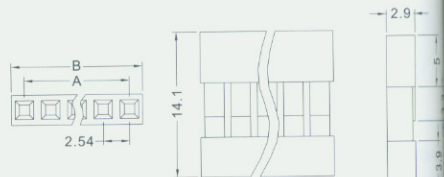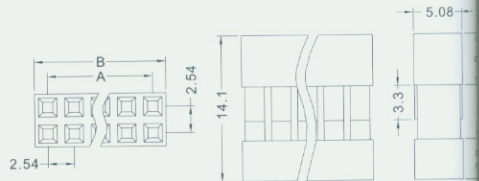

[TERMINALS]

