


DS1013 SERIES


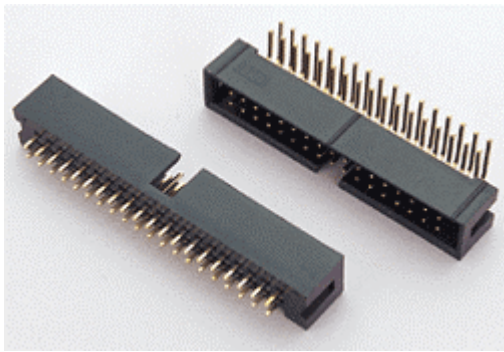


MATERIAL

Insulator: Thermoplastic {UL 94V-0}
 Color: See ordering Information
 Contact: Copper Alloy
 Contact Plated: See ordering information
 Shell: Copper Alloy

SPECIFICATION

Storage Temperature: -20-70°C
 Operating Temperature: 0-85°C
 Contact Resistance: 20mΩ max.(initial)
 Insulation Resistance: 1,000MΩ min
 Dielectric Withstanding Voltage: AC1,000V per minute

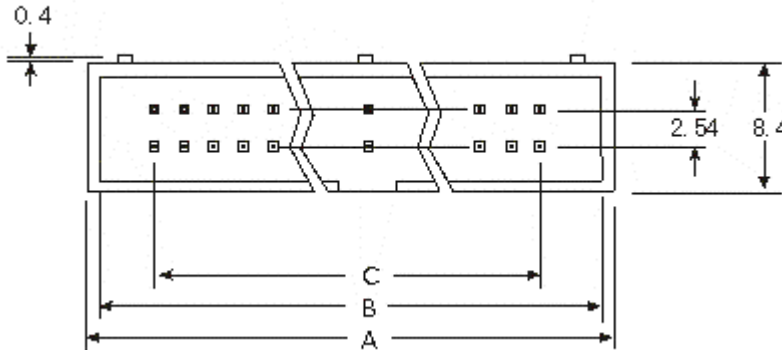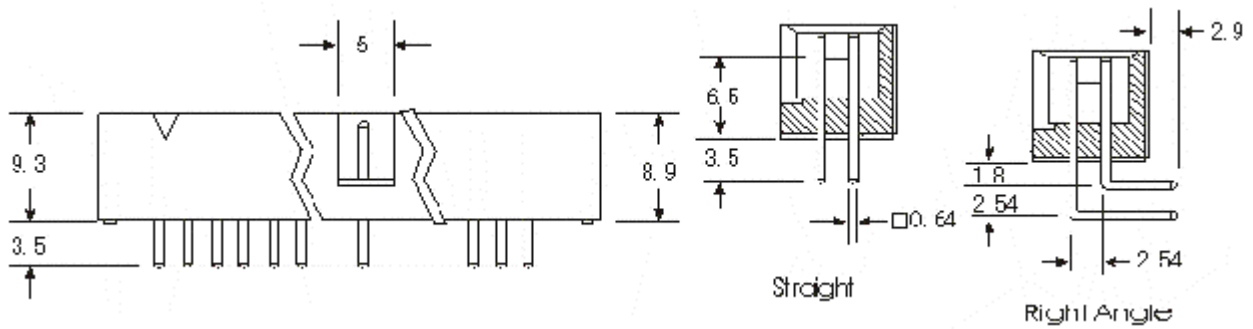

Dimension	A	B	C
10	20.30	18.10	10.16
12	22.84	20.64	12.70
14	25.38	23.18	15.24
16	27.92	25.72	17.78
20	33.00	30.80	22.86
26	40.62	38.42	30.48
30	45.70	43.50	35.56
34	50.78	48.58	40.64
40	58.40	56.20	48.26
50	71.10	68.90	60.96
60	83.80	81.60	73.66
64	88.88	86.68	78.74

Ordering Information

Series No.	No. of Contacts	Mounting Type	Contact Plating	Housing Color	Wieson Logo
DS1014	34	S	F1	B	N
	06 24 50 08 26 56 12 30 60 14 34 62 16 40 64 20 44	S: Straight, Dip R: R/A, Dip M: SMT	F1: Gold Flash (Please contact us for other plating thickness)	B: Black	N: w/o Logo