


# DS1014 SERIES








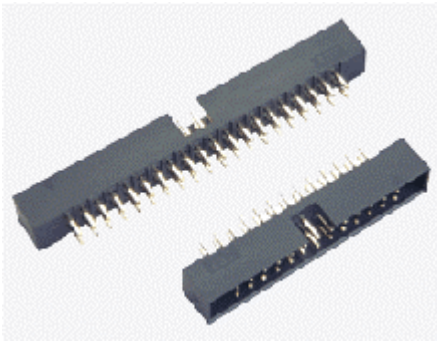


## MATERIAL


Insulator: Thermoplastic {UL 94V-0}  
 Color: See ordering Information  
 Contact: Copper Alloy  
 Contact Plated: See ordering information  
 Shell: Copper Alloy

## SPECIFICATION

Storage Temperature: -20-70°C  
 Operating Temperature: 0-85°C  
 Contact Resistance: 20mΩ max.(initial)  
 Insulation Resistance: 1,000MΩ min  
 Dielectric Withstanding  
 Voltage: AC1,000V per minute

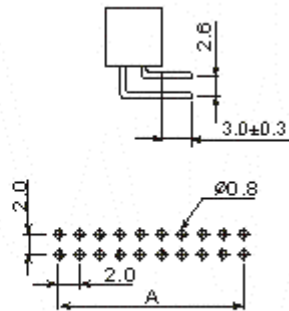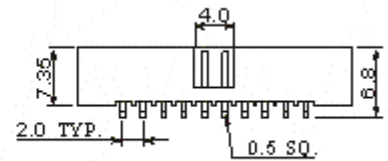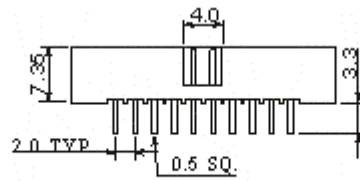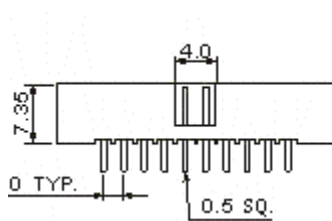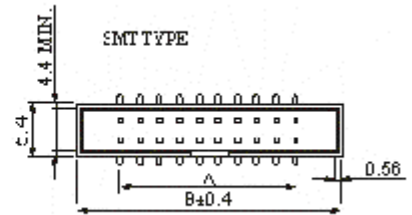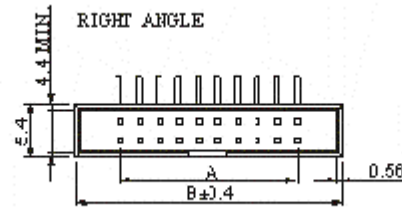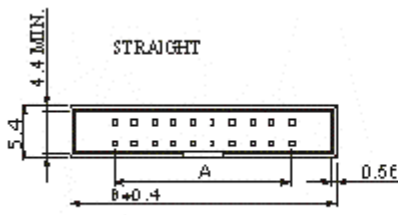

RECOMMENDED P.C BOARD HOLE LAYOUT

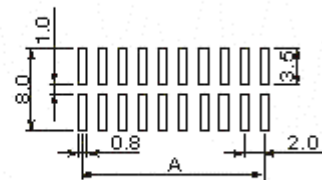

RECOMMENDED P.C BOARD HOLE LAYOUT

## Ordering Information

Series No.	No. of Contacts	Mounting Type	Contact Plating	Housing Color	Wieson Logo
DS1014	34	S	F1	B	N
	06 24 50	S: Straight, Dip	F1: Gold Flash	B: Black	N: w/o Logo
	08 26 56	R: R/A, Dip	(Please contact us for other plating thickness)		
	12 30 60	M: SMT			
	14 34 62				
	16 40 64				
	20 44				