


DS1020 SERIES



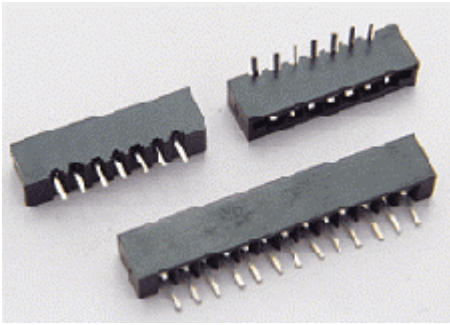


MATERIAL

Insulator: Thermoplastic {UL 94V-0}
 Color: See ordering Information
 Contact: Copper Alloy
 Contact Plated: See ordering information
 Shell: Copper Alloy

SPECIFICATION

Storage Temperature: -20-70°C
 Operating Temperature: 0-85°C
 Contact Resistance: 20mΩ max.(initial)
 Insulation Resistance: 1,000MΩ min
 Dielectric Withstanding Voltage: AC1,000V per minute

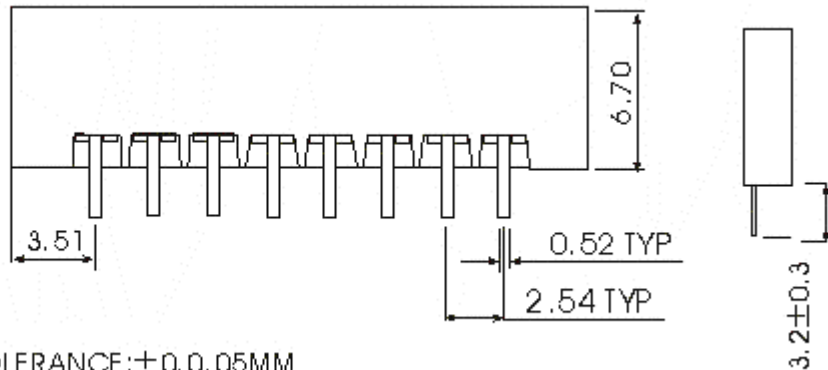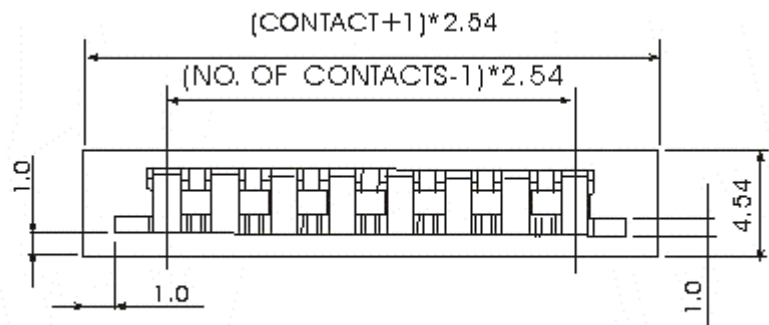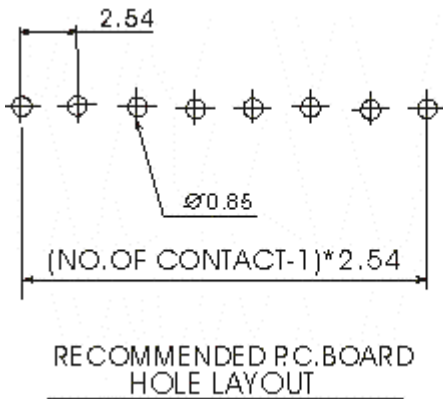

NOTE: P.C.B LAYOUT TOLERANCE: ±0.005MM

Ordering Information

Series No.	No. of Contacts	Contact Type	Contact Plating
DS1020	16 02-30	S S: Straight R: R/A	T1 T1: 100μ" Min. Sn/Pb overal 50μ" Ni um depleted