


# DS1021 SERIES

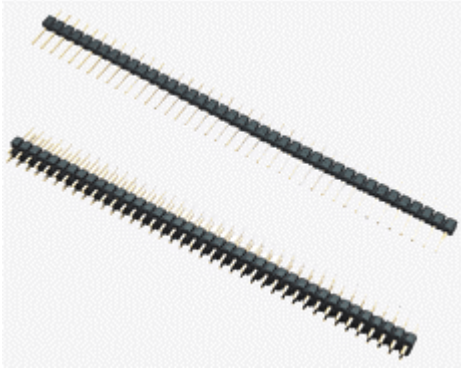

## MATERIAL

Insulator: Thermoplastic {UL 94V-0}

Contact: Copper Alloy

Contact Plated: See ordering information

## SPECIFICATION

Storage Temperature: -20-70°C

Operating Temperature: 0-85°C

Contact Resistance: 20mΩ



max.(initial)

Insulation Resistance: 1,000MΩ

min

Dielectric Withstanding

Voltage: AC1,000V per minute

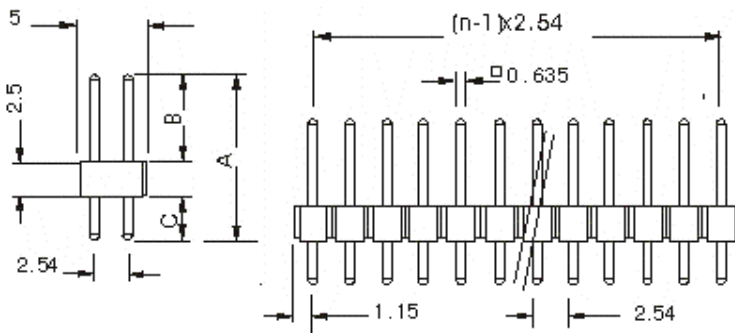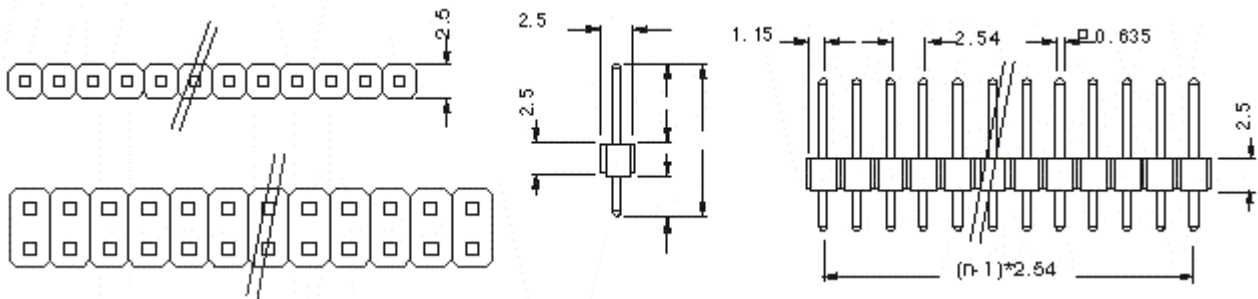

Code	Dimension A	Dimension B	Dimension C
0900	9.00	4.0	2.5
1020	10.20	5.2	2.5
1080	10.80	5.8	2.5
1160	11.60	6.1	3.0
1260	12.60	7.1	3.0
1390	13.90	8.4	3.0
1490	14.90	9.4	3.0
1790	17.90	12.4	3.0
1650	16.50	11.0	3.0
1980	19.80	14.3	3.0
2160	21.60	16.1	3.0
2280	22.80	17.3	3.0
2490	24.90	19.4	3.0

## Ordering Information

Series No.

**DS1021**

No. of Contacts

**1\*40**

1 Row 1\*1-1\*40  
2 Row 2\*2-2\*40

Mounting Type

**S**

S: Straight, Dip

Contact Plating

**F1**

F1: Gold Flash  
(Please contact us for other plating thickness)