


DS1022 SERIES

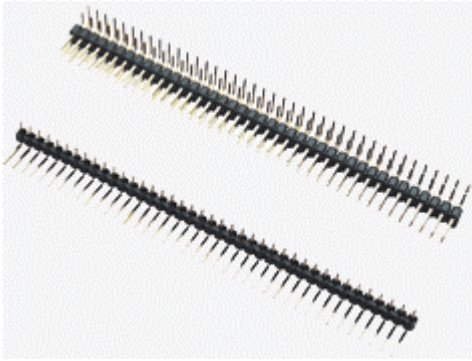

MATERIAL

Insulator: Thermoplastic {UL 94V-0}

Contact: Copper Alloy

Contact Plated: See ordering information

SPECIFICATION

Storage Temperature: -20-70°C


Operating Temperature: 0-85°C

Contact Resistance: 20mΩ max.(initial)

Insulation Resistance: 1,000MΩ min

Dielectric Withstanding

Voltage: AC1,000V per minute

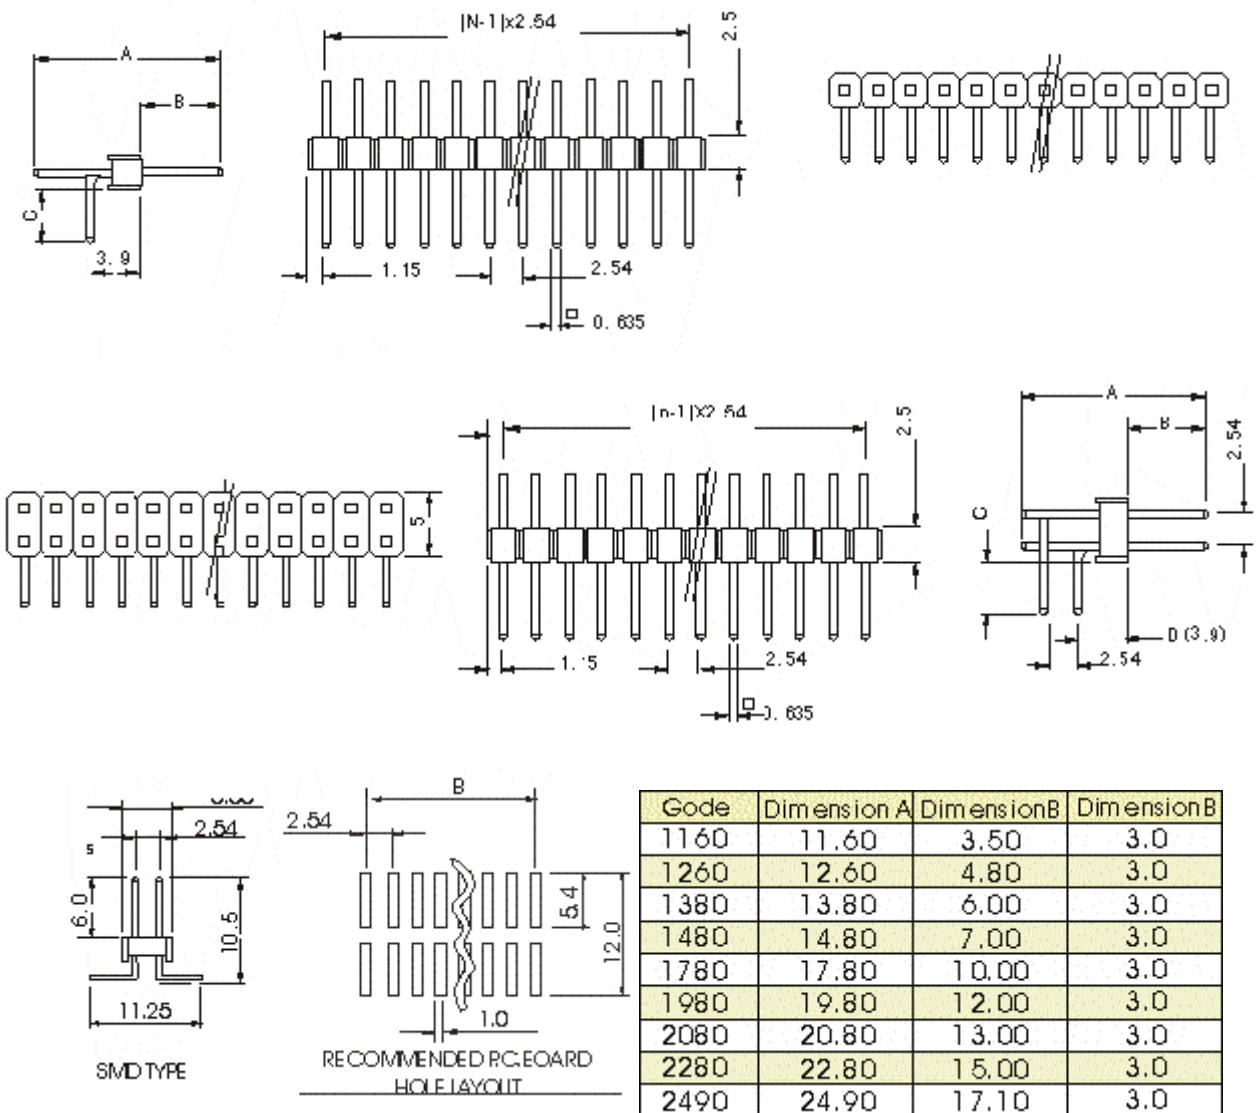

Ordering Information

Series No.

DS1022

No. of
Contacts

1*40

1 Row 1*1-1*40
2 Row 2*2-2*40

Ejector
Type

R

R:R/A, Dip
M:SMT

Contact Plating

F1

F1: Gold Flash
(Please contact us for
other plating thickness)