


## DS1024 SERIES

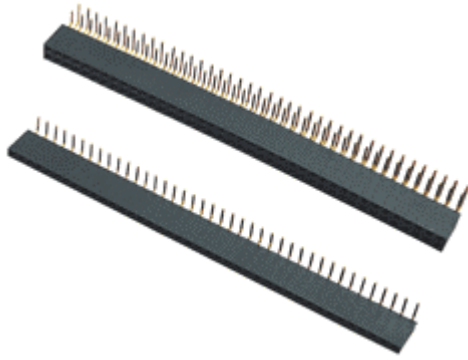

### MATERIAL

Insulator: Thermoplastic {UL 94V-0}

Contact: Copper Alloy





Contact Plated: See ordering information

### SPECIFICATION

Temperature: -55-105°C

Dielectric Withstanding Voltage: AC 500V

Insulation Resistance: 5,000M Ω to +105°C  
current rate: 3Amps

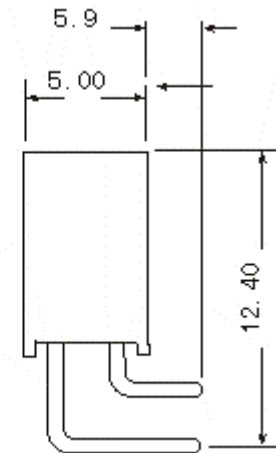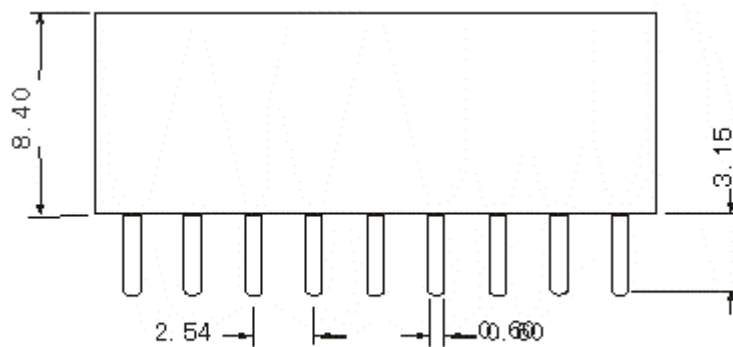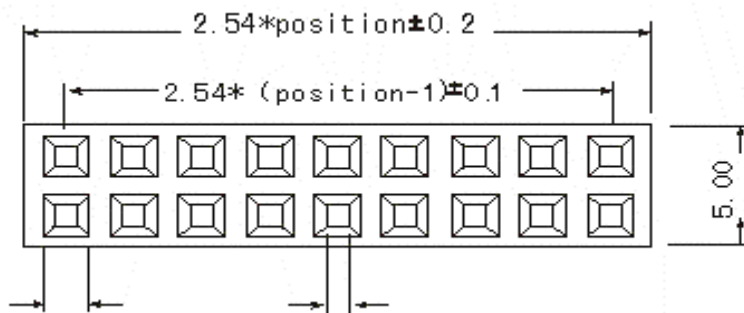

### Ordering Information

Series No.

DG1024

No. of Contacts

2\*17

1 Row 1\*2-1\*40  
2 Rows 2\*2-2\*40

Mounting Type

A

R: R/A  
A: Single Side  
B: Double Side

Contact Plating

F1

F1: Gold Flash  
(Please contact us for other plating thickness)