


## DS1036 SERIES

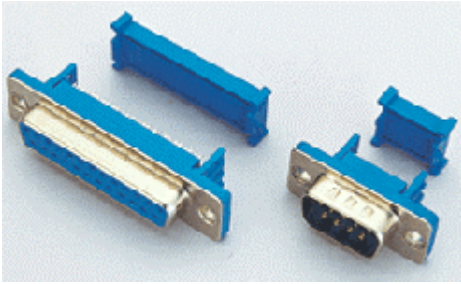


### MATERIAL

Insulator: Thermoplastic {UL 94V-0}  
 Color: see ordering information  
 Contact: Copper Alloy  
 Contact Plated: See ordering information  
 Shell: Copper Alloy


### SPECIFICATION

Storage Temperature: -20-70°C  
 Operating Temperature: 0-85°C  
 Contact Resistance: 20mΩ max.(initial)  
 Insulation Resistance: 1,000MΩ min  
 Dielectric Withstanding Voltage: AC1,000V per minute

### MALE

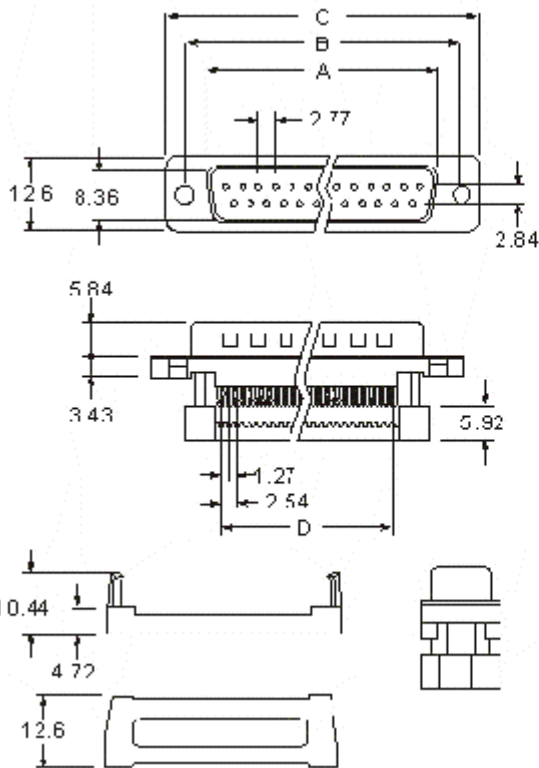

### FEMALE

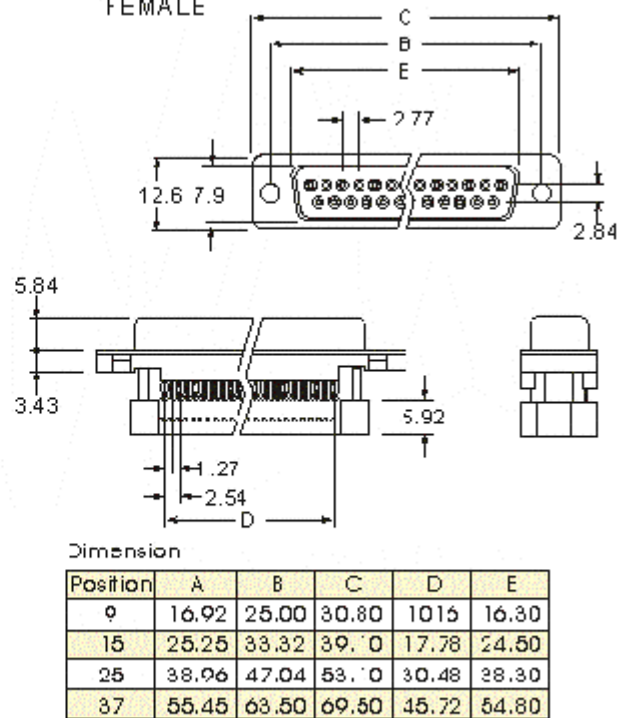

### Ordering Information

Series No.	No. of Contacts	Contact Type	Housing Type	Strain Relief	Housing Color	Contact Plating
DS1036	25	M	M	N	U	S1
	09 15 25 37	M: Male F: Female	M: Male P: All Plastic	N: No P: With	B: Black U: Blue G: Gray	S1: Gold Flash Please contact us for other plating thickness