

DS1039 SERIES



MATERIAL


Insulator:Thermoplastic {UL 94V-0}
Color:see ordering information
Contact:Copper Alloy
Contact Plated:See ordering information
Shell:Copper Alloy

SPECIFICATION

Storage Temperature:5AMP
Dielectric strength:1,000V for 1 minute
Insulation Resistance:1,000M Ω min.at 500V DC
Temperature:-55℃ ~ +105℃

FEATURES

Low cost,high density PCB mounted connector
Will mate to other ribbon type connectors
Selective plating (gold-palladium plated contact and solder-plated terminal)
UL recognized material design reduce installation time up to 2/3 for lowest installed cost benefits

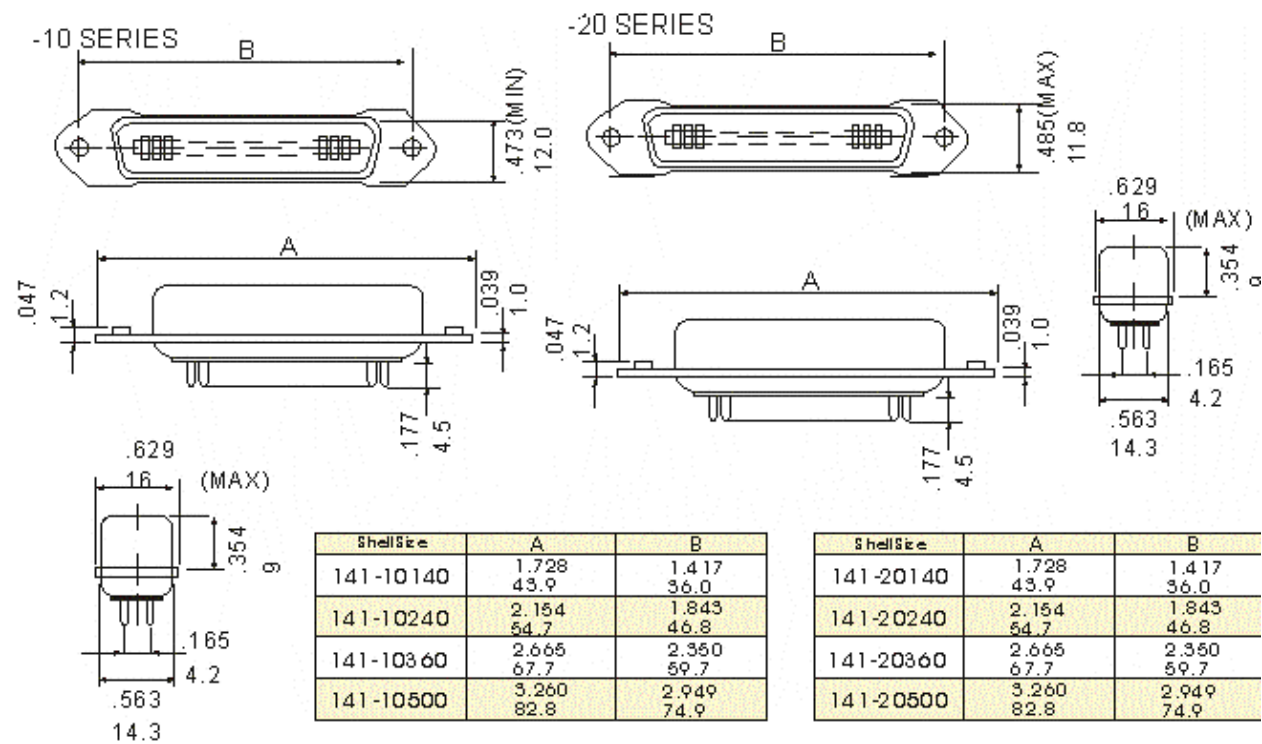

UNIT:mm

Ordering Information

Series No.	No.of Pins	Contact Type	Color	Contact platec
DS1039	32	10	B	G
	14 36 24 50	10-male 20-female	B:Blue W:White K:Black	G:Gold flash S:Selective gold 05-5 μ" 10-10 μ" 20-20 μ" 30-30 μ"