


## DS1057 & DS1058 SERIES

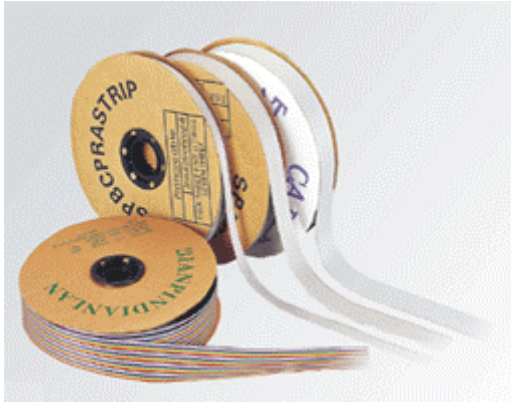


### ■ Features

- ◆ Easy one-step IDC connection without insulation stripping.
- ◆ No need to distinguish the rear side because both sides of the cable are the same.
- ◆ Easy branching by splitting.
- ◆ Rating: 105°C, 300V
- ◆ Standard: Applicable Standard: UL Subject 758
- ◆ Conductor Size 24, 26, 28 AWG

### ■ APPLICATION

- ◆ Internal wiring of computers, electronic exchanges, measurement control devices, business machines, communication devices, and other electronic equipment.

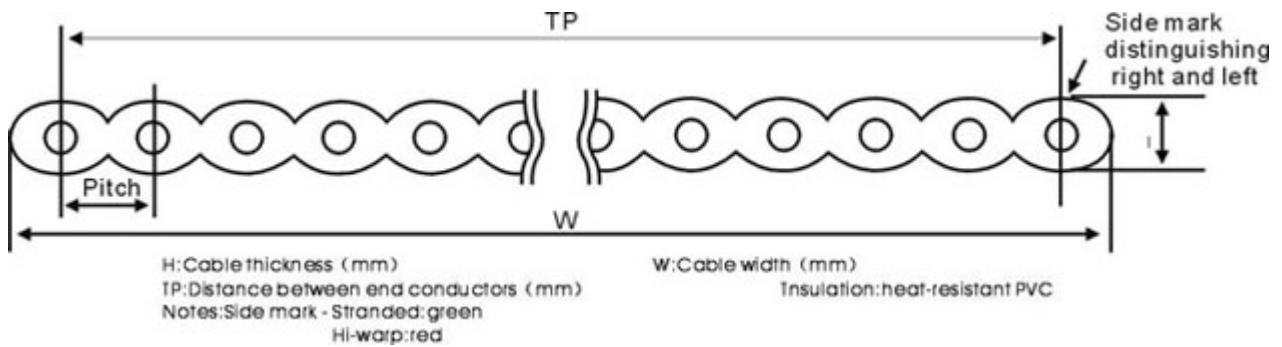

## Construction and characteristics

Conductor				Dimensions			Max. cond. resistance, DC 20°C ( $\Omega/\text{km}$ )	Min. insulation resistance, DC 20°C ( $\text{M}\Omega\cdot\text{km}$ )	Dielectric withstanding voltage (VAC for 1 min)
Number	Size (AWG)	Construction (No./mm)	Diameter (mm)	TP(mm)	W(mm)	H(mm)			
10	28	7/0.127	0.38	11.34	12.70	0.89	224	100	2000
14	28	7/0.127	0.38	16.51	17.78	0.89			
16	28	7/0.127	0.38	19.05	20.32	0.89			
20	28	7/0.127	0.38	24.13	25.40	0.89			
24	28	7/0.127	0.38	29.21	30.48	0.89			
26	28	7/0.127	0.38	31.75	33.02	0.89			
30	28	7/0.127	0.38	36.83	38.10	0.89			
34	28	7/0.127	0.38	41.91	43.18	0.89			
40	28	7/0.127	0.38	49.53	50.80	0.89			
50	28	7/0.127	0.38	62.23	63.50	0.89			
60	28	7/0.127	0.38	74.93	76.20	0.89			