

## DS1059 SERIES




### PRODUCT DESCRIPTION

- ◆ Tinned stranded or solid copper conductor, 30-16 AWG
- ◆ Color-coded PVC insulation
- ◆ Rated temperature: 80°C Rated voltage: 300 volts
- ◆ Passes UL VW-1 & CSA FT1 vertical flame test. OS-1 is available.
- ◆ Uniform thickness of wire to ensure easy stripping and cutting.
- ◆ Resistant to acids, oils, alkalies, moisture and fungus.

### APPLICATION

- ◆ For general purpose internal wiring of electronic and electrical equipment.

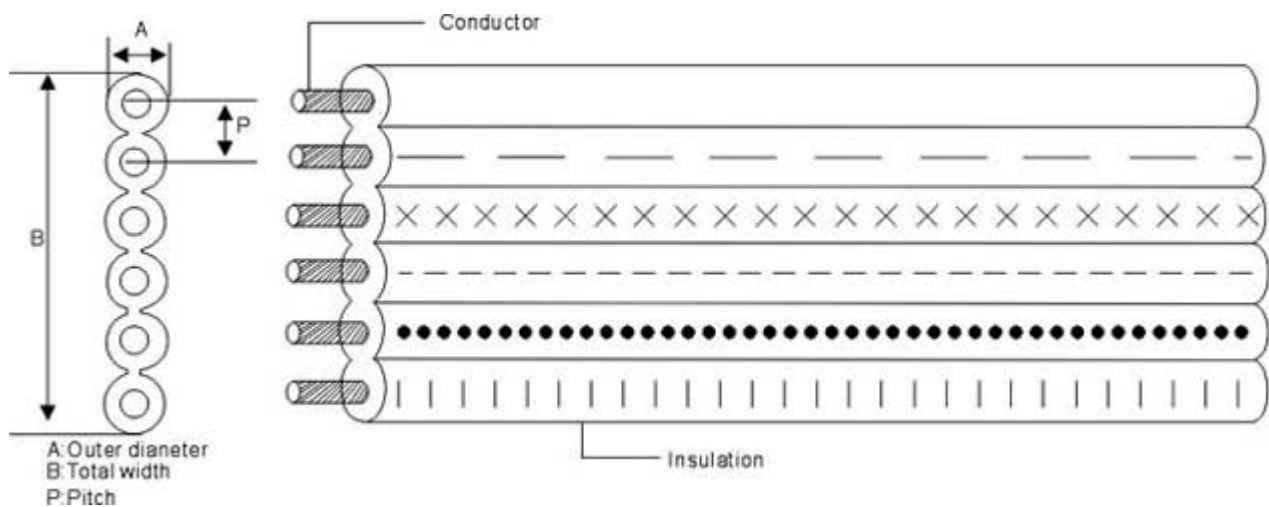

	Conductor			Insulation Thickness	Overall Diameter	Standard Put-Up	
	AWG	Construction (No./mm)	Sect.Area (mm <sup>2</sup> )			ft/coil	M/coil
2468 (Stranded)	26	7/0.160	0.13	0.45	1.38±0.10	2000	610
	24	11/0.160	0.21		1.51±0.10		
	22	17/0.160	0.33		1.60±0.10		
	20	21/0.180	0.52		1.80±0.10		
	18	34/0.180	0.82		2.00±0.10		
	16	26/0.254	1.31		2.20±0.10		