

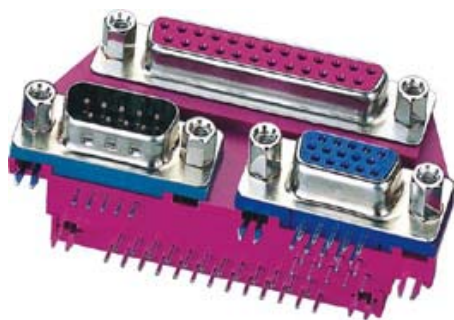



**DS1082 SERIES**



**MATERIAL**

- ◆Contact Resistance:25mΩ max
- ◆Insulator Resistance:5000mΩmin.at DC 500v
- ◆Rated Current:3AMP
- Dielectric With standing
- ◆Voltage:AC 1000V For 1minute
- ◆Contact:Brass
- ◆Housing:PBT&30% Glass Fiber(UL94V-0)

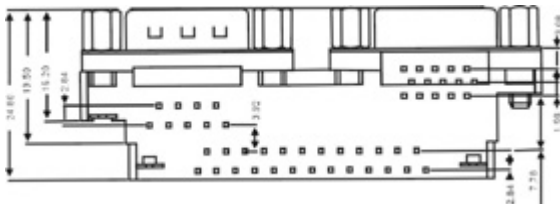

**Ordering infomation**

Series No .  
**Ds1082**

COLOR OF HOUSING  
**W**  
W:WHITE  
K:BLACK  
B:BLUE

SHELL PLATED  
**1**  
1:CHROMATED SHELL  
2:TIN SHELL

contactr plated  
**T**  
T:TIN PLATED  
G:GOLD PLATED