

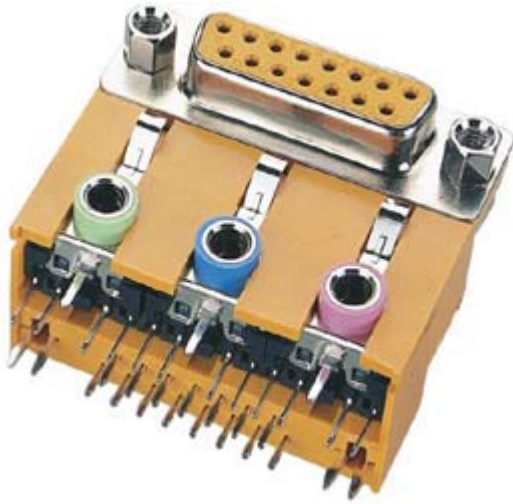
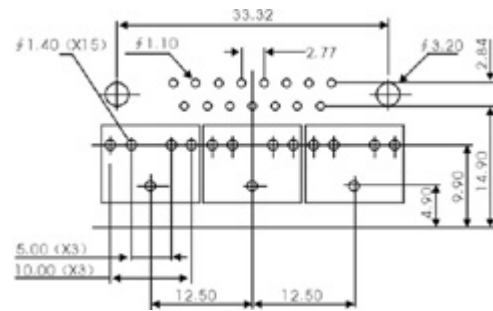



DS1083 SERIES

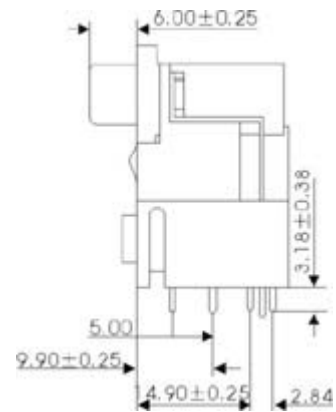

MATERIAL

- ◆ Contact Resistance: $25\text{m}\Omega$ max
- ◆ Insulator Resistance: $5000\text{m}\Omega/\text{min.}$ at DC 500v
- ◆ Rated Current: 3AMP
- Dielectric With standing
- ◆ Voltage: AC 1000V For 1minute
- ◆ Contact: Brass
- ◆ Housing: PBT&30% Glass Fiber(UL94V-0)

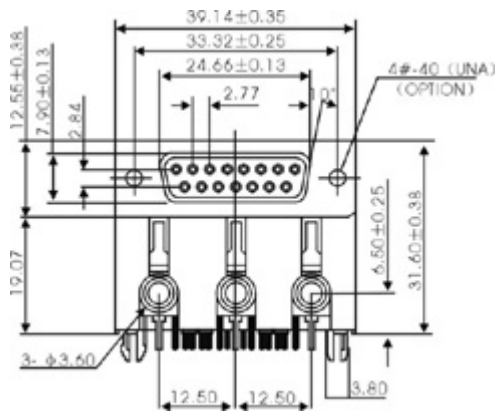

Ordering infomation

SERIES NO.	CONTACT CONFIGURATION		JACK TYPE
Ds1083	B	S	3J
	B:15POS	S:SOCKET(RECEPTACLE)	3:3 PCS J:AUDIO JACK
CONTACT PLATING	RIET&HEX SCREW		COLOR STYLE
C	1	1	
CONTACT PLATING	1:4-40 UNC(RIVET)		1:BLACK
1:FULL GOLD.	2:M2.6(RIEVT)		2:FOR PC99 FOLLOW
2:GOLD FLASH	3:M3(RIEVT)		PANTONE COLOR
3:5u"GOLD.	4:4-40 UNC(RIEVT) ATTACH		15S GOLDEN
4:10"GOLD.	4-40 UNC(HEX)		AUDIO JACK
5:15"GOLD.	5:SPECIAL SCREWAVAILABLE		LEFT PORT LIGHT GREEN
6:30"GOLD.			MIDDLE PORT LIGHT BLUE
			RIGHT PORT PINK