


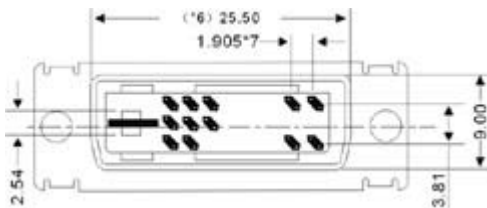


DS1084 SERIES



MATERIAL

- ◆Contact Resistance:25mΩ max
- ◆Insulator Resistance:5000mΩmin.at DC 500v
- ◆Rated Current:3AMP
- Dielectric With standing
- ◆Voltage:AC 1000V For 1minute
- ◆Contact:Brass
- ◆Housing:PBT&30% Glass Fiber(UL94V-0)

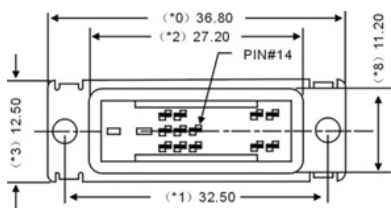

Ordering infomation

SERIES NO.	COLOR OF HOUSING	CONTACT PLATED	SHELL PLATED
Ds1084	W	T	1
	W:WHITE K:BLACK B:BLUE	T:TIN PLATED G:GOLD PLATED	1:CHROMATED SHELL 2:TIN SHELL