

FYLF-1140UR1C


Features:

- High intensity
- General purpose leads
- RoHs compliant.


Descriptions:

- Dice material: AlGaInP
- Emitting Color: Super Bright Red
- Device Outline: Flat head
- Lens Type: water clear.

Radiation pattern.

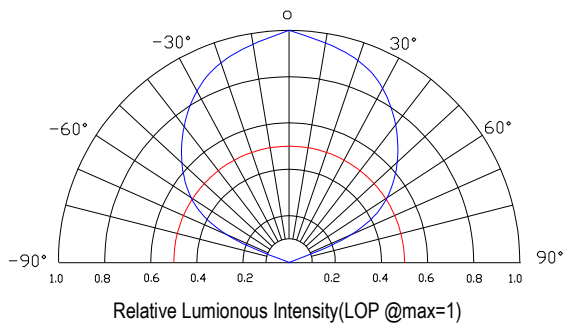

Package configuration

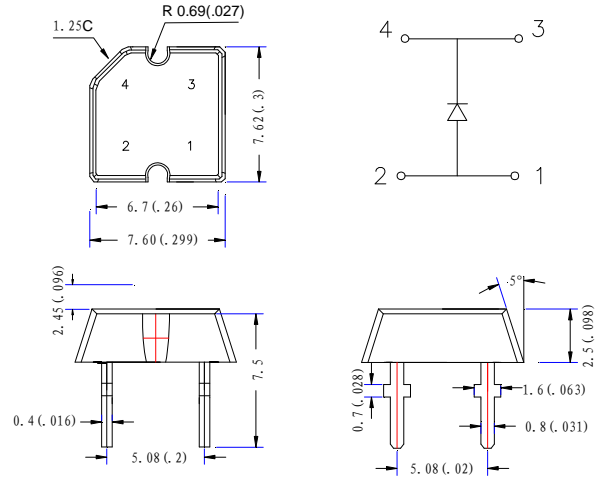

- ◆ All dimensions are millimeters (inches)
- ◆ Tolerance is $\pm 0.25\text{mm}(.010\text{'})$ unless otherwise noted.


Absolute maximum ratings($T_a=25\text{ }^\circ\text{C}$)

Parameter	MAX.	Unit
Power Dissipation	50	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Continuous Forward Current	20	mA
Derating Linear From 50°C	0.4	mA/ $^\circ\text{C}$
Reverse Voltage	5	V
Operating Temperature Range	-30°C to $+80^\circ\text{C}$	
Storage Temperature Range	-40°C to $+100^\circ\text{C}$	
Lead Soldering Temperature[4mm(.157") From Body]	260 $^\circ\text{C}$ for 5 Seconds	





Electrical and optical characteristics($T_a=25\text{ }^\circ\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I_v	-	320	-	mcd	$I_F=20\text{mA}$
Viewing Angle	$2\theta_{1/2}$	110	120	130	Deg	
Peak Emission	λ_p	625	630	635	nm	
Dominant Wavelength	λ_d	623	628	633	nm	
Spectral Line Half-Width	$\Delta\lambda$	10	15	20	nm	
Forward Voltage	V_F	1.8	2.0	2.3	V	$V_R=5\text{V}$
Reverse Current	I_R			50	μA	



Typical Electrical Characteristics Curves (25 °c Ambient Temperature Unless Otherwise Noted)

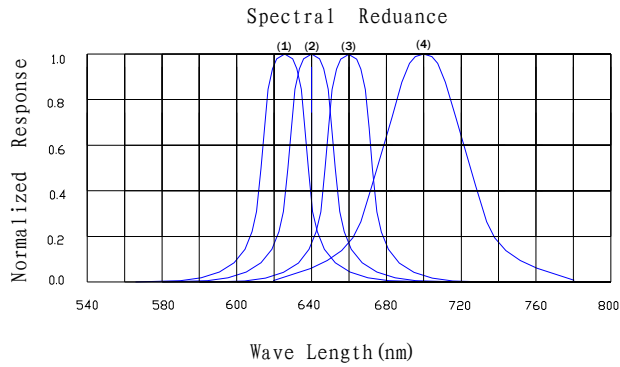


- (1) AlGaInP peak@625/Red
- (2) GaAsP/GaP peak@640nm /Red
- (3) AlGaAs/GaAs peak@660nm/Super Red
- (4) GaP peak@700nm/ Red

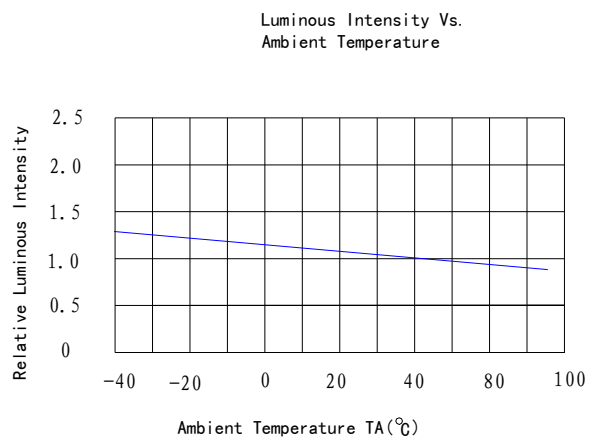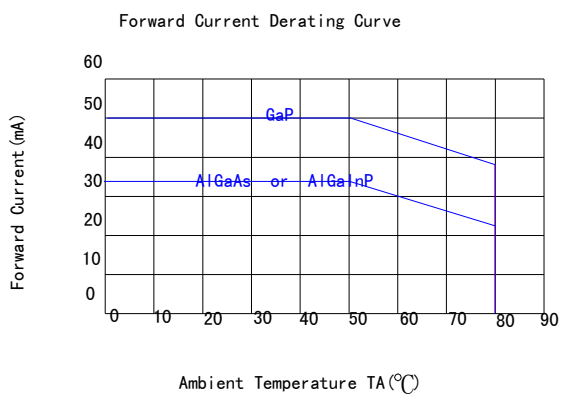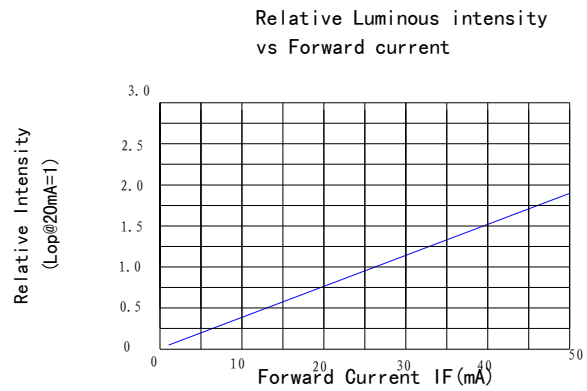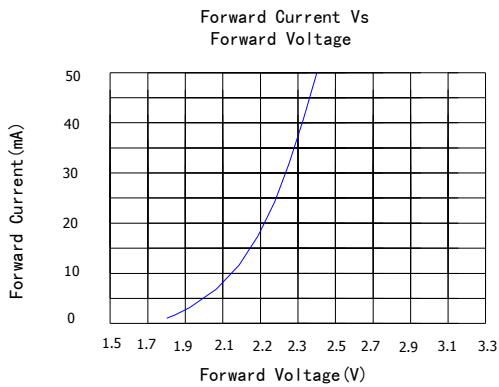


Flux LEDs PACKING.

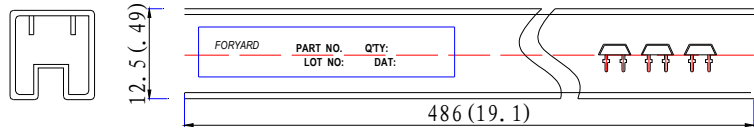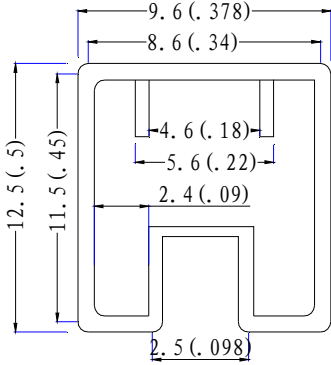


Adhesive Pipe
Dimension:mm(inches)
Each Adhesive Pipe 60 pcs




Box
Dimension (cm) : 53*15*16.5

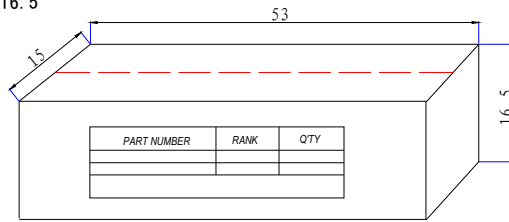

Each box/carotr 10,000pcs



CARTON
Dimension(cm):56*32*34.4

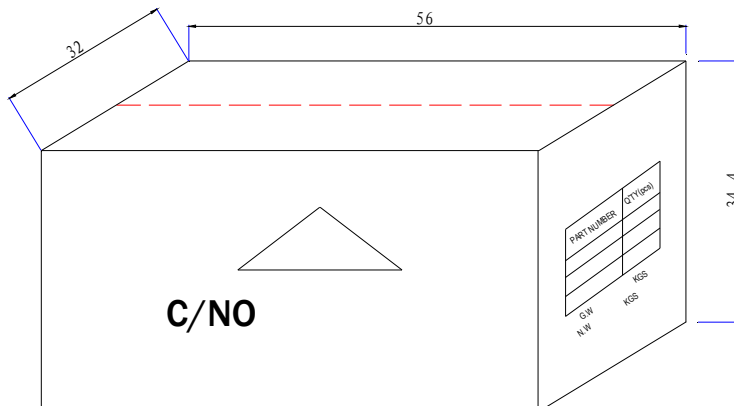

4 Boxes/Carton
Total :40,000pcs