FORYARD
OPTOELECTRONICS

HIGH POWER

FYLP-1W-UYS

Features:

- Long operating life
- Highest flux
- Available in Yellow
- Lambertian radiation pattern
- More energy efficient than incandescent and most halogen lamps
- Low voltage DC operated
- Cool beam,safe to the touch
- Instant light (less than 100ns)
- Fully dimmable
- No UV
- Lower Rth
- ROHS compliant

Radiation Pattern

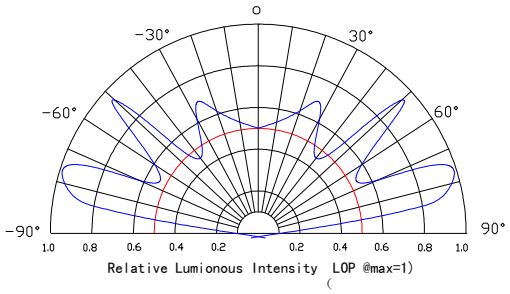

Package Dimensions

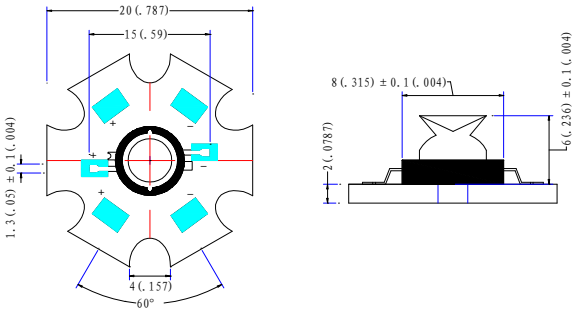

Applications

- Reading lights(car,bus,aircraft)
- LCD Backlights /light Guides
- Fiber optic alternative/Decorative/Entertainment
- Mini-accent/Up lighters/Down lighters/ Orientation
- Indoor/Outdoor commerclal and Residentlal Architectural
- Cove/Under shelf /Task
- Bollards/Security/Garden
- Portable(flashlight,bicycle)
- Edge-lit signs (Exit, point of sale)
- Automotive Exit (stop –tail-Turn ,CHMSL,Mirror Side Repeat)
- Trafficsignaling /Beacons/railCrossing and Wayside

FORYARD
OPTOELECTRONICS

HIGH POWER

■ **Typical Optical/Electrical Characteristics@TJ=25℃**

Item	symbol	Condition	Min	Typ	Max	Unit
Forward Voltage	VF	IF=350mA		2.2	2.5	V
Reverse Current	IR	VR=5V			50	uA
50% Power Angle	$2\theta_{1/2}$	IF=350mA	--	175	--	deg
Luminous Intensity	Φv	IF=350mA	28	32		LM
Recommend Forward Current	IF			350		mA
Wave length	λd	IF=350mA	585		595	nm
Thermal Resistance,Junction to Case	Rjp	IF=350mA		10		℃/W

Notes: 1. Tolerance of measurement of forward voltage ± 0.1v

2. **Tolerance of measurement of peak Wavelength** ± 2.0nm

3. **Tolerance of measurement of luminous intensity** ± 15%.

■ Absolute Maximum Rating

Item	symbol	Absolute Maximum Rating	Unit
Forward Current	IF	350	mA
Peak Forward Current*	IFD	500	mA
Reverse Voltage	VR	5	V
Power Dissipation	PD	1000	mW
Operation Temperature	TOPR	-30℃ to +80℃	
Storage Temperature	TSTG	-40℃ to +100℃	
Lead Soldering Temperature*	TSOL	260℃ for 3 Seconds Max	

- **IFP Conditions :Pulse Width** ⩽10 msec duty⩽1/10
- **All high Power emitter LED products mounted on aluminum metal-core printed circuit board, can be lighted directly ,but we do not recommend lighting the high power products for more than 5 seconds without a directly,but we do not recommend lighting the high powe products for more than 5 seconds without a appropriate heat dissipation equipment.**
- **Re-flow, wave peak and soak-stannum soldering etc. is not suitable for this products.**
- **Sueggest to solder it by professional high power LED soldering machine.**
- **Can use invariable –temperature searing-iron with soldering condition:** ⩽260 degreen less than 3 seconds.

FORYARD
OPTOELECTRONICS

HIGH POWER

■ Typical optical/Electrical Characteristics Curves (Tj=25℃ Unless Otherwise Noted)

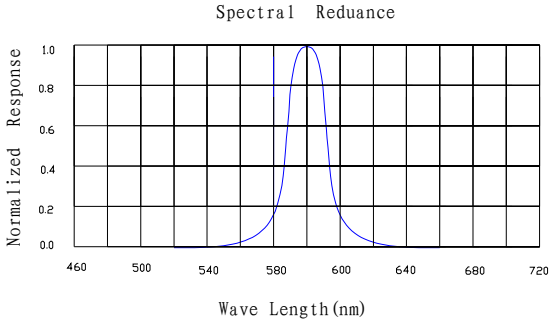
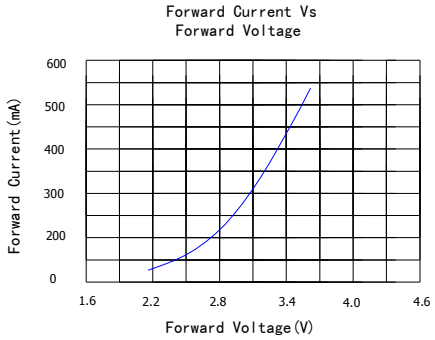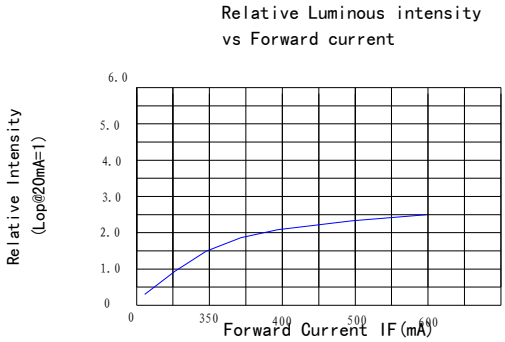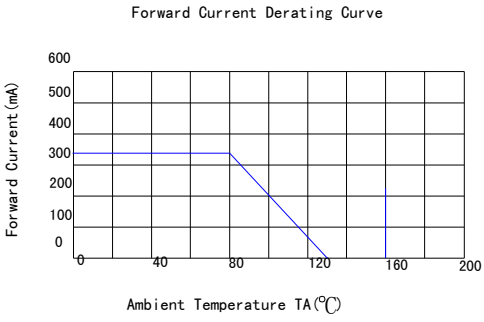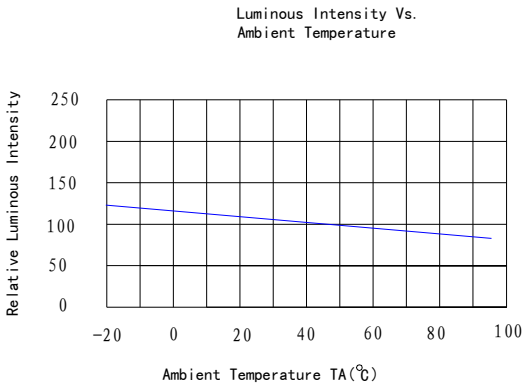
Peak@590nm /Red