


## FYLF- 1140UW4C

### Features:


- High intensity
- General purpose leads
- RoHs compliant.

### Descriptions:

- Dice material: InGaN
- Emitting Color: White
- Lens Type: Water clear

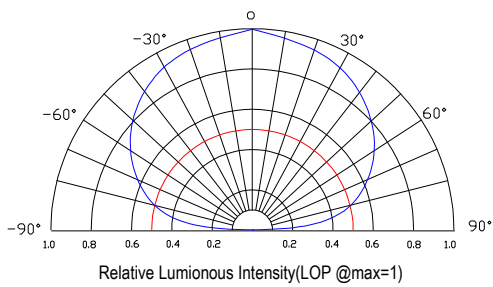

### Package configuration

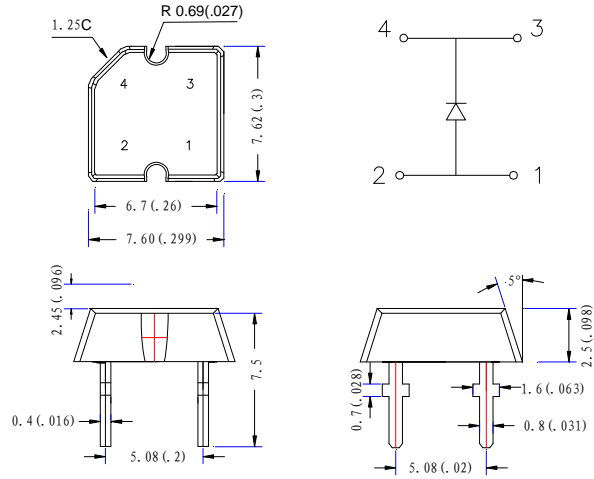

- ◆ All dimensions are millimeters (inches)
- ◆ Tolerance is  $\pm 0.25\text{mm}(.010\text{'})$  unless otherwise noted.

### Radiation pattern.

### Absolute maximum ratings( $T_a=25\text{ }^\circ\text{C}$ )


Parameter	MAX.	Unit
Power Dissipation	300	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	400	mA
Continuous Forward Current	80	mA
Derating Linear From 50°C	0.4	mA/°C
Reverse Voltage	5	V
Electrostatic Discharge (ESD)	1000	V
Operating Temperature Range	-20°C to +80°C	
Storage Temperature Range	-30°C to +100°C	
Lead Soldering Temperature[4mm(.157") From Body]	260°C for 5 Seconds	

### Electrical and optical characteristics( $T_a=25\text{ }^\circ\text{C}$ )


Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	$I_v$	-	2000	-	mcd	$I_F=80\text{mA}$
Viewing Angle	$2\theta_{1/2}$	-	160	-	Deg	
Chromaticity coordinates	x		0.30			
	y		0.31			
CCT			8000		k	
Forward Voltage	$V_F$	2.8	3.2	3.6	V	
Reverse Current	$I_R$			10	$\mu\text{A}$	$V_R=5\text{V}$

**Typical Electrical Characteristics Curves**  
(25 °c Ambient Temperature Unless Otherwise Noted)


Forward Current vs. Ambient Temperature

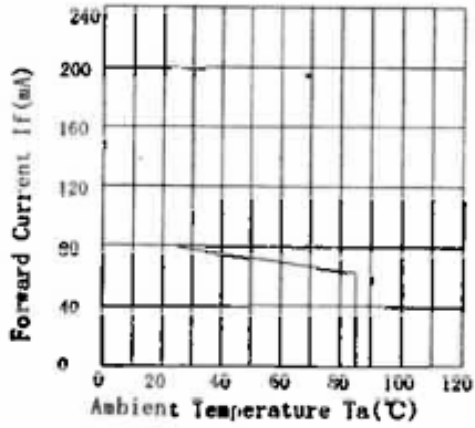


Relative Intensity vs. Ambient Temperature

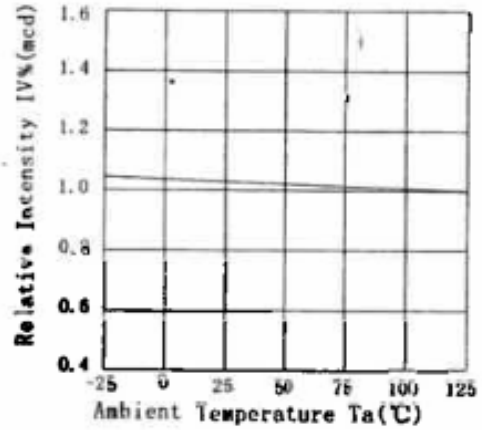



Forward Current vs. Forward Voltage

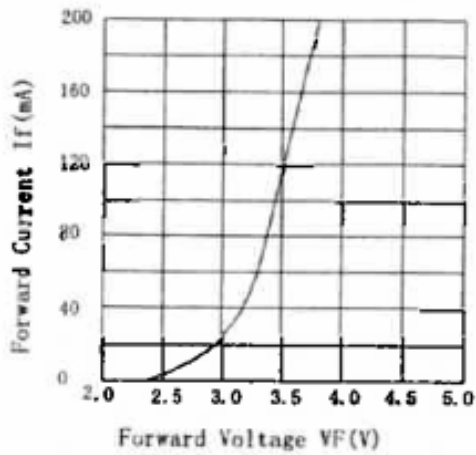


Forward Voltage vs. Ambient Temperature

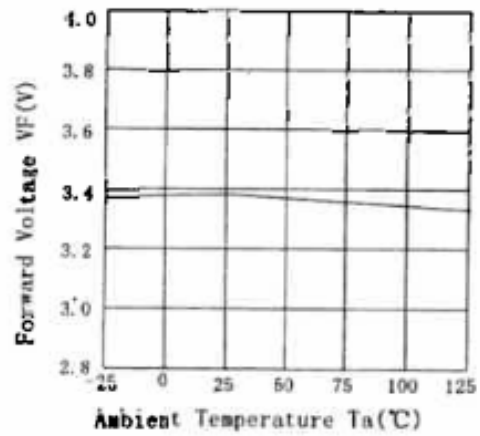


## Flux LEDs PACKING.

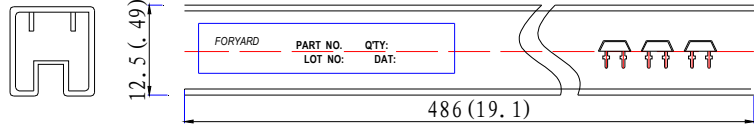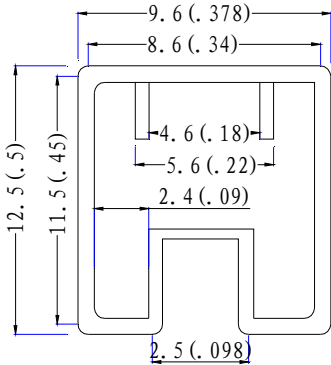


Adhesive Pipe  
Dimension:mm(inches)  
Each Adhesive Pipe 60 pcs




Box  
Dimension (cm) : 53\*15\*16.5

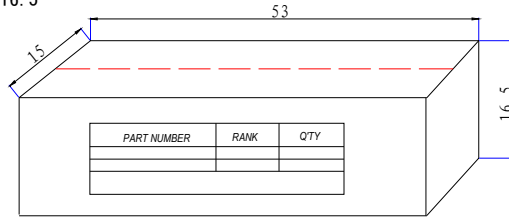

Each box/carotn 10,000pcs



**CARTON**  
Dimension(cm):56\*32\*34.4

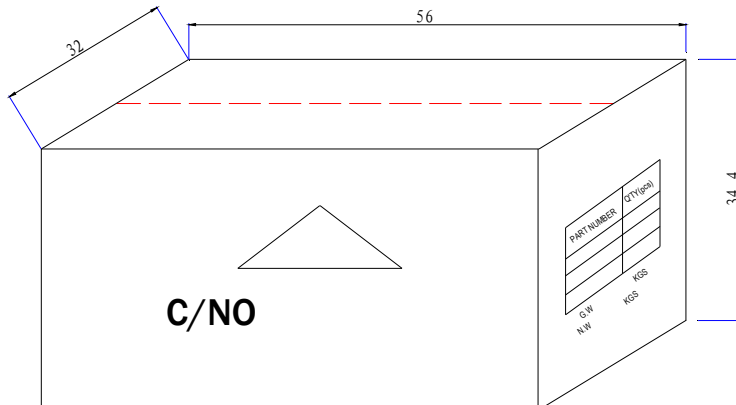

**4 Boxes/Carton**  
**Total :40,000pcs**