


FYLP-3W-UBL


Features:

- Long operating life
- Highest flux
- Available in Blue
- Lambertian radiation pattern
- More energy efficient than incandescent and most halogen lamps
- Low voltage DC operated
- Cool beam,safe to the touch
- Instant light (less than 100ns)
- Fully dimmable
- No UV
- Superior ESD protection
- Lower Rth
- ROHS compliant

Radiation Pattern

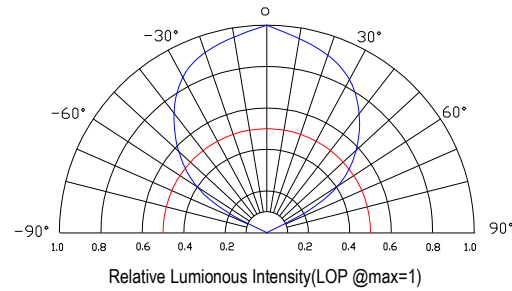

Package Dimensions

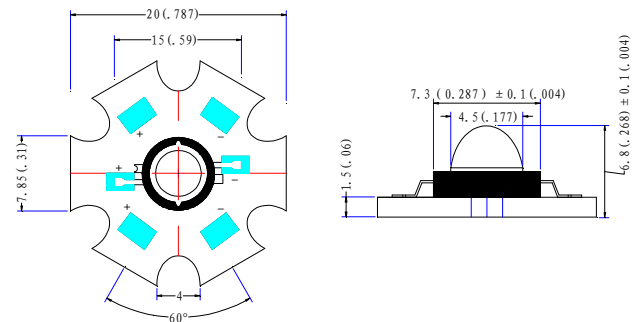

Applications

- Reading lights(car,bus,aircraft)
- LCD Backlights /light Guides
- Fiber optic alternative/Decorative/Entertainment
- Mini-accent/Up lighters/Down lighters/ Orientation
- Indoor/Outdoor commercial and Residential Architectural
- Cove/Under shelf /Task
- Bollards/Security/Garden
- Portable(flashlight,bicycle)
- Edge-lit signs (Exit, point of sale)
- Automotive Exit (stop –tail-Turn ,CHMSL,Mirror Side Repeat)
- Trafficsignaling /Beacons/rail Crossing and Wayside

■ Typical Optical/Electrical Characteristics@TJ=25℃

Item	symbol	Condition	Min	Typ	Max	Unit
Forward Voltage	VF	IF=800mA	3.2	3.4		V
Reverse Current	IR	VR=5V			50	uA
50% Power Angle	2θ _{1/2}	IF=800mA	100	110	120	deg
Luminous Intensity	Φ _v	IF=800mA	15	20	-	LM
Recommend Forward Current	IF			800		mA
Wave length	λ _d	IF=800mA	460	-	470	nm
Thermal Resistance,Junction to Case	R _{jp}	IF=800mA		10		℃/W

- Notes: 1. Tolerance of measurement of forward voltage $\pm 0.1\text{v}$
 2. Tolerance of measurement of peak Wavelength $\pm 2.0\text{nm}$
 3. Tolerance of measurement of luminous intensity $\pm 15\%$.

■ Absolute Maximum Rating

Item	symbol	Absolute Maximum Rating	Unit
Forward Current	IF	800	mA
Peak Forward Current*	IFD	1200	mA
Reverse Voltage	VR	5	V
Power Dissipation	PD	3000	mW
Electrostatic discharge	ESD	± 4500	V
Operation Temperature	TOPR	-30℃ to +80℃	
Storage Temperature	TSTG	-40℃ to +100℃	
Lead Soldering Temperature*	TSOL	260℃ for 3 Seconds Max	

- IFP Conditions :Pulse Width $\leq 10\text{ msec}$ duty $\leq 1/10$
- All high Power emitter LED products mounted on aluminum metal-core printed circuit board, can be lighted directly ,but we do not recommend lighting the high power products for more than 5 seconds without a directly,but we do not recommend lighting the high powe products for more than 5 seconds without a appropriate heat dissipation equipment.
- Re-flow, wave peak and soak-stannum soldering etc. is not suitable for this products.
- Suggest to solder it by professional high power LED soldering machine.
- Can use invariable –temperature searing-iron with soldering condition: $\leq 260\text{ degree}$ less than 3 seconds.

■ Typical optical/Electrical Characteristics Curves (Tj=25°C Unless Otherwise Noted)

